



This property can also be readily felt naturally by hand when handling samples of neat PLA versus samples that have 10% Lapol® 108 compounded into them. See the picture below that shows the neat PLA cracks when bent, while the 10% Lapol® 108 compounded into the PLA readily bends demonstrating toughness.

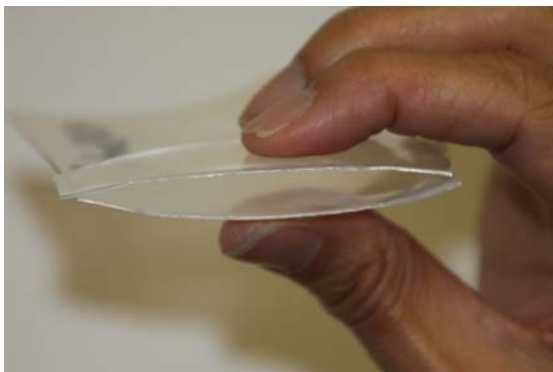

Neat PLA

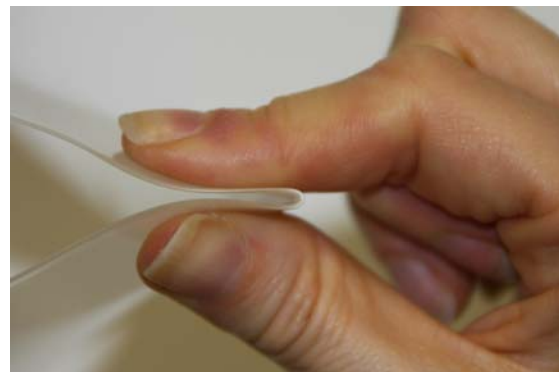

10% Lapol® 108 Compounded into PLA